

STATIC MIXER



Static mixers are tubular internals that produce desired mixing and dispersion effects as the fluid flows around motionless mixer parts. The fluids are delivered by pumps.



Reliable and reproducible mixing result can be expected with our static mixers that are produced using modern moulding technology.


Be it highly viscous or low viscous liquid, a wide variety of standard static mixers are ready for selection.



STATIC MIXER

MA Series Static Mixer

MA series disposable plastic static mixer feature a simple twist-lock mounting. The mixers' first element automatically aligns with the dividing wall when used with the 50 ml cartridge, separating Part A and Part B. MA series static mixers come in a wide variety of sizes and will mix virtually any 2-part material including epoxies, silicones, urethanes, acrylics and polyesters.

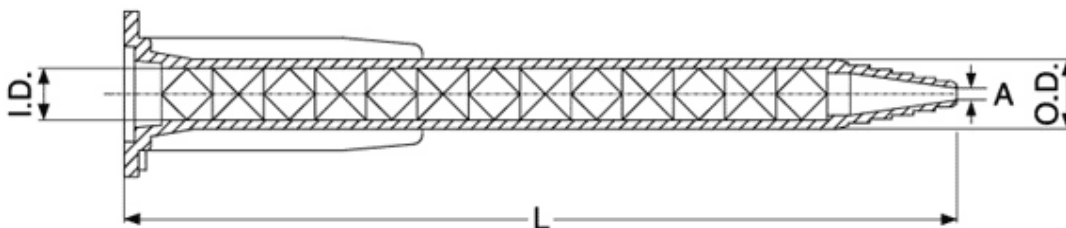

Feature:

- Outer Housing: Polypropylene (PP)
- Elements: Polypropylene (PP)
- Retaining Method: Bayonet style twist-lock
- For Ratios 1:1 & 2:1



Part No.	I.D.(mm)	Elements	O.D. (mm)	L(mm)	Outlet I.D. A (mm)	Volume (ml)
MA 3.0-07S	3	7	4.6	33.2	1.0	0.19
MA 3.0-17S	3	17	4.6	62.2	1.0	0.34
MA 4.0-13S	4	13	5.8	66.0	2.0	0.6
MA 5.4-07S	5.4	7	7.0	55.7	1.5	0.78
MA 5.4-13S	5.4	13	7.0	84.6	1.5	1.36
MA 5.4-17S	5.4	17	7.6	103.6	1.5	1.68
MA 6.3-21S	6.3	21	8.7	153.0	1.5	3.57
MA 6.3-21L	6.3	21	8.7	151.5	1.6	3.33




STATIC MIXER

MC Series Static Mixer

MC disposable mixers can be used with 200ml, 400ml and other dual cartridge dispensing systems. The mixer element is designed to provide less resistance while dispensing. This is particularly important in hand-held dispensing to minimize operator fatigue.

MC mixers come in a wide variety of sizes and will mix virtually any 2-part material including epoxy, silicone, urethane, acrylic and polyester resins. The mixers are used for a wide range of low-pressure meter mix applications.

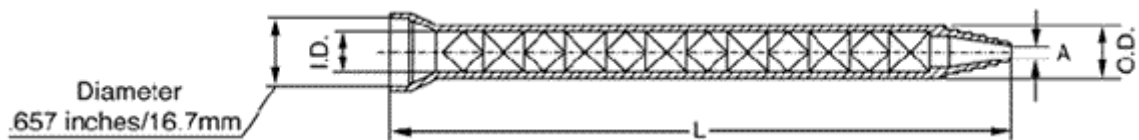

Feature:

- Outer Housing: Polypropylene (PP)
- Elements: Polypropylene (PP)
- Retaining Method: 7/8"-9 thread
- For Ratios 1:1 & 2:1





Part No.	I.D.(mm)	Elements	O.D. (mm)	L(mm)	Outlet I.D. A (mm)	Volume (ml)
MC 05-24	5	24	8.0	149.0	1.5	2.3
MC 05-32	5	32	8.0	188.0	1.5	2.8
MC 06-32	6.35	24	10.0	185.0	1.9	4.2
MC 06-32	6.35	32	10.0	234.0	1.9	6.6
MC 08-24	8	24	12.0	223.0	2.4	8.5
MC 08-32	8	32	12.0	287.0	2.4	11.5
MC 10-24	10	24	14.0	276.0	3.0	14.6
MC 10-32	10	32	14.0	352.0	3.0	21.8



STATIC MIXER



ME / MS Series Static Mixer



Part No.	I.D.(mm)	Elements	O.D. (mm)	L(mm)	Outlet I.D. A (mm)	Volume (ml)
ME/MS 05-24	5	24	8.0	149.0	1.5	2.3
ME/MS 05-32	5	32	8.0	188.0	1.5	2.8
ME/MS 06-24	6.35	24	10.0	185.0	1.9	4.2
ME/MS 06-32	6.35	32	10.0	234.0	1.9	6.6
ME/MS 06-48	6.35	48	10.5	334.0	2.2	10
ME/MS 08-24	8	24	12.0	223.0	2.4	8.5
ME/MS 08-32	8	32	12.0	287.0	2.4	11.5
ME/MS 10-24	10	24	14.0	276.0	3.0	16
ME/MS 10-32	10	32	14.0	352.0	3.0	23
ME/MS 1012-0832	10-8	12+32	14-12	409.0	2.4	19
ME/MS 13-24	13	24	17.0	293.0	4.0	27
ME/MS 13-32	13	32	17.0	379.0	4.0	34.5
ME/MS 1312-1032	13-10	12+32	17-14	499.0	7.2	37.5

